



4A SFP WDM 1G 3km SC

**TX-1550/RX-1310 nm Single-mode Bi-directional
SFP SC Simplex Connector**



Features

- Up to 1.25Gb/s bi-directional data links
- Compliant with SONET/SDH Standard
- Compliant with Fast Ethernet standard
- 1550nm FP laser and PIN photodetector
- Industry standard small form pluggable (SFP) Package
- Simplex SC connector
- Differential LVPECL inputs and outputs
- Single power supply 3.3V
- TTL signal detect indicator
- Hot Pluggable
- Up to 3KM point to point transmission
- Class 1 laser product complies with EN 60825-1
- ROHS Compliant



Absolute Maximum Ratings

PARAMETER	SYMBOL	MIN	MAX	UNITS	NOTE
Storage Temperature	TS	-40	+100	°C	
Supply Voltage	Vcc	-0.5	6.0	V	
Input Voltage	VIN	-0.5	Vcc	V	
Output Current	Io		50	mA	
Operating Current	IOP		400	mA	
Case Operating Temperature	TC	0	+70	°C	
Supply Voltage	Vcc	3.1	3.5	V	
Supply Current	ITX + IRX	---	250	mA	



Transmitter Electro-optical Characteristics

V_{CC} = 3.1 V to 3.5 V, TC = 0 °C to +70 °C

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Output Optical Power 9/125 μm fiber	<i>P_{out}</i>	-12	---	-3	dBm	Average
Extinction Ratio	<i>ER</i>	9	---	---	dB	
Center Wavelength	<i>λ_C</i>	1530	1550	1570	nm	
Spectral Width (RMS)	<i>Δλ</i>	---	---	4	nm	
Rise/Fall Time, (20–80%)	<i>T_{r,f}</i>	---	---	260	ps	
Relative Intensity Noise	<i>RIN</i>	---	---	-120	dB/Hz	
Total Jitter	<i>TJ</i>	---	---	227	ps	
Output Eye	Compliant with IEEE802.3z					
Max. <i>P_{out}</i> TX-DISABLE Asserted	<i>POFF</i>	---	---	-45	dBm	
Differential Input Voltage	<i>VDIFF</i>	0.4	---	2.0	V	


Receiver Electro-optical Characteristics

V_{CC} = 3.1 V to 3.5 V, TC = 0 °C to +70 °C

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Optical Input Power-maximum	<i>PIN</i>	0	---	---	dBm	BER < 10 ⁻¹⁰
Optical Input Power-minimum (Sensitivity)	<i>PIN</i>	---	---	-23	dBm	BER < 10 ⁻¹⁰
Operating Center Wavelength	<i>λ_C</i>	1260		1360	nm	
Optical Return Loss	<i>ORL</i>	45	---	---	dB	λ = 1260~1360nm
Optical isolation	<i>ISO</i>	---	---	-35	dB	λ = 1260~1360nm
Signal Detect-Asserted	<i>PA</i>	---	---	-23	dBm	
Signal Detect-Deasserted	<i>PD</i>	-35	---		dBm	
Differential Output Voltage	<i>VDIFF</i>	0.5	---	1.6	V	
Data Output Rise, Fall Time (20–80%)	<i>T_{r,f}</i>	---	---	2	ns	
Receiver Loss of Signal Output Voltage-Low	<i>RX_LOSL</i>	0	---	0.5	V	
Receiver Loss of Signal Output Voltage-High	<i>RX_LOSH</i>	2.4	---	V _{CC}	V	



Block Diagram of Transceiver

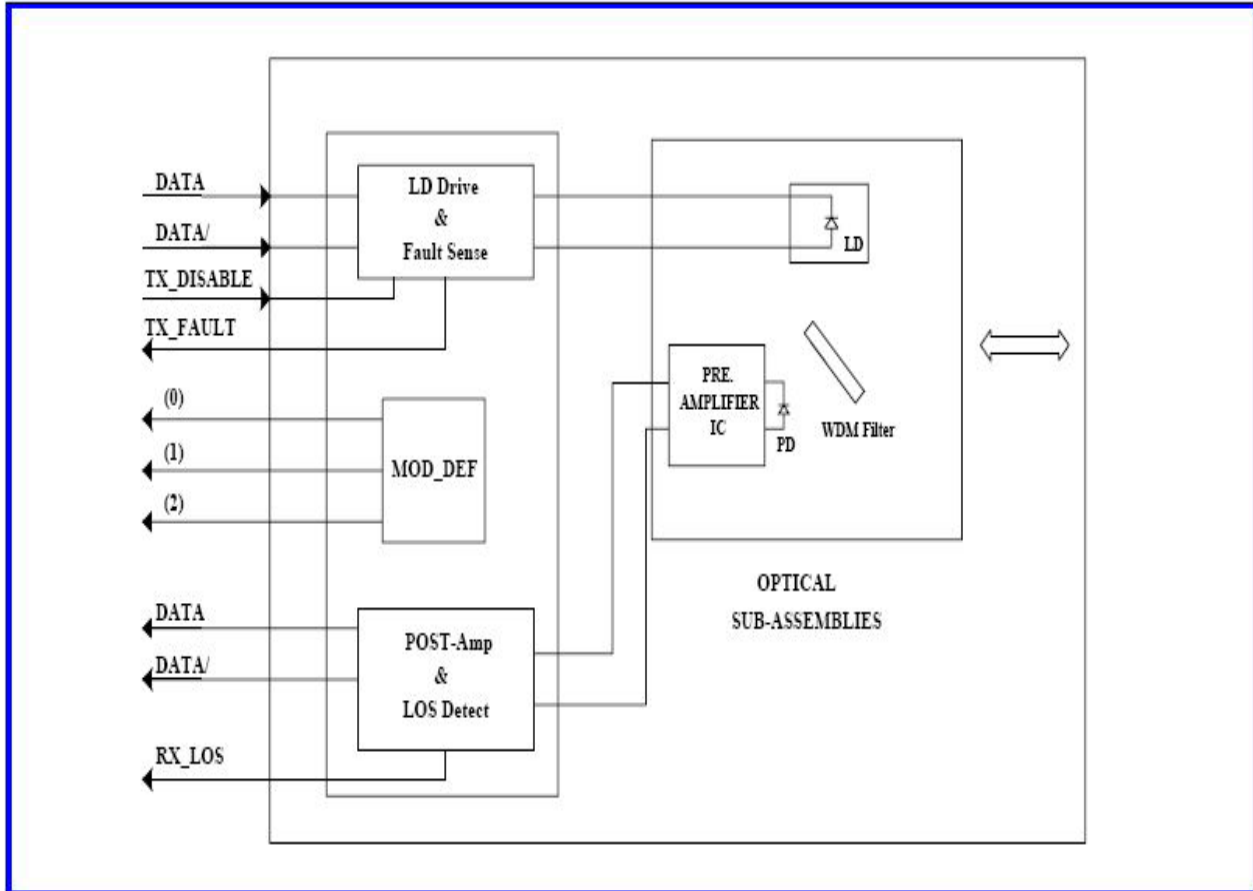

Transmitter and Receiver Optical Sub-assembly Section



A 1550 nm InGaAsP laser and an InGaAs PIN photodiode integrate with an WDM filter to form a bi-directional single fiber optical subassembly (OSA). The laser of OSA is driven by a LD driver IC which converts differential input LVPECL logic signals into an analog laser driving current. And, The photodiode of OSA is connected to a circuit providing post-amplification quantization, and optical signal detection.

TX_DISABLE

The TX_DISABLE signal is high (TTL logic “1”) to turn off the laser output.


Receive Loss (RX_LOS)

The RX_LOS is high (logic “1”) when there is no incoming light from the companion transceiver. This signal is normally used by the system for the diagnostic purpose. The signal is operated in TTL level.

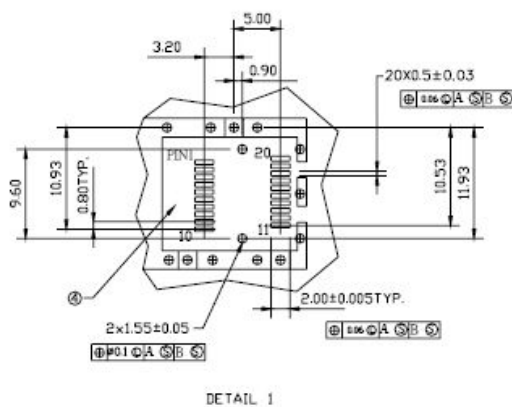[illegible]


- 1.PADS AND VIAS ARE CHASSIS GROUND
- 2.THROUGH HOLES, PLATING OPTIONAL
- 3.HATCHED AREA DENOTES COMPONENT AND TRACE KEEPOUT(EXCEPT CHASSIS GROUND)
- 4.AREA DENOTES COMPONENT KEEPOUT (TRACES ALLOWED)

Unit: mm

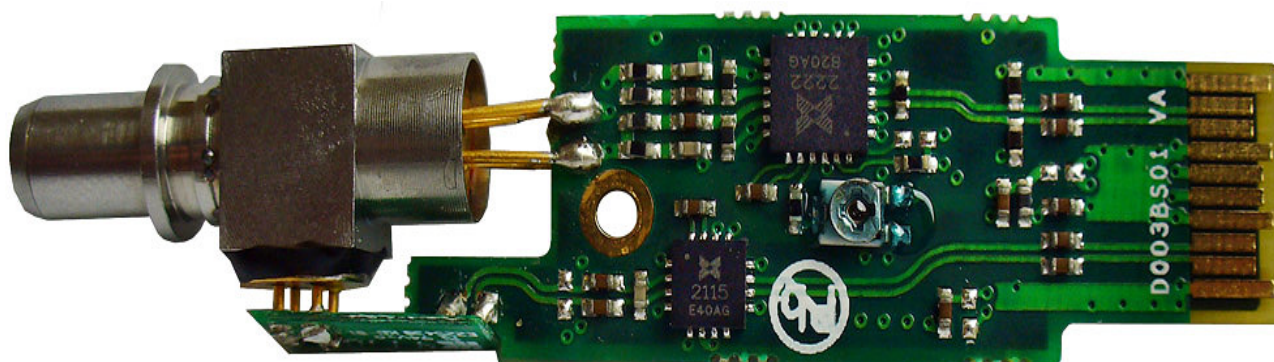

Pin Assignment


Pin-Out

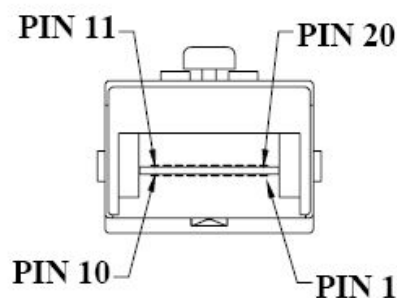

Pin	Signal Name	Description
1	T_{GND}	Transmit Ground
2	TX_FAULT	Transmit Fault
3	$TX_DISABLE$	Transmit Disable
4	$MOD_DEF (2)$	SDA Serial Data Signal
5	$MOD_DEF (1)$	SCL Serial Clock Signal
6	$MOD_DEF (0)$	TTL Low
7	$RATE_SELECT$	Open Circuit
8	RX_LOS	Receiver Loss of Signal, TTL High, open collector
9	R_{GND}	Receiver Ground
10	R_{GND}	Receiver Ground
11	R_{GND}	Receiver Ground
12	$RX-$	Receive Data Bar, Differential PECL, ac coupled
13	$RX+$	Receive Data, Differential PECL, ac coupled
14	R_{GND}	Receiver Ground
15	V_{CCR}	Receiver Power Supply
16	V_{CCT}	Transmitter Power Supply
17	T_{GND}	Transmitter Ground
18	$TX+$	Transmit Data, Differential PCEL, ac coupled
19	$TX-$	Transmit Data Bar, Differential PCEL, ac coupled
20	T_{GND}	Transmitter Ground



Suggested Transceiver Interface

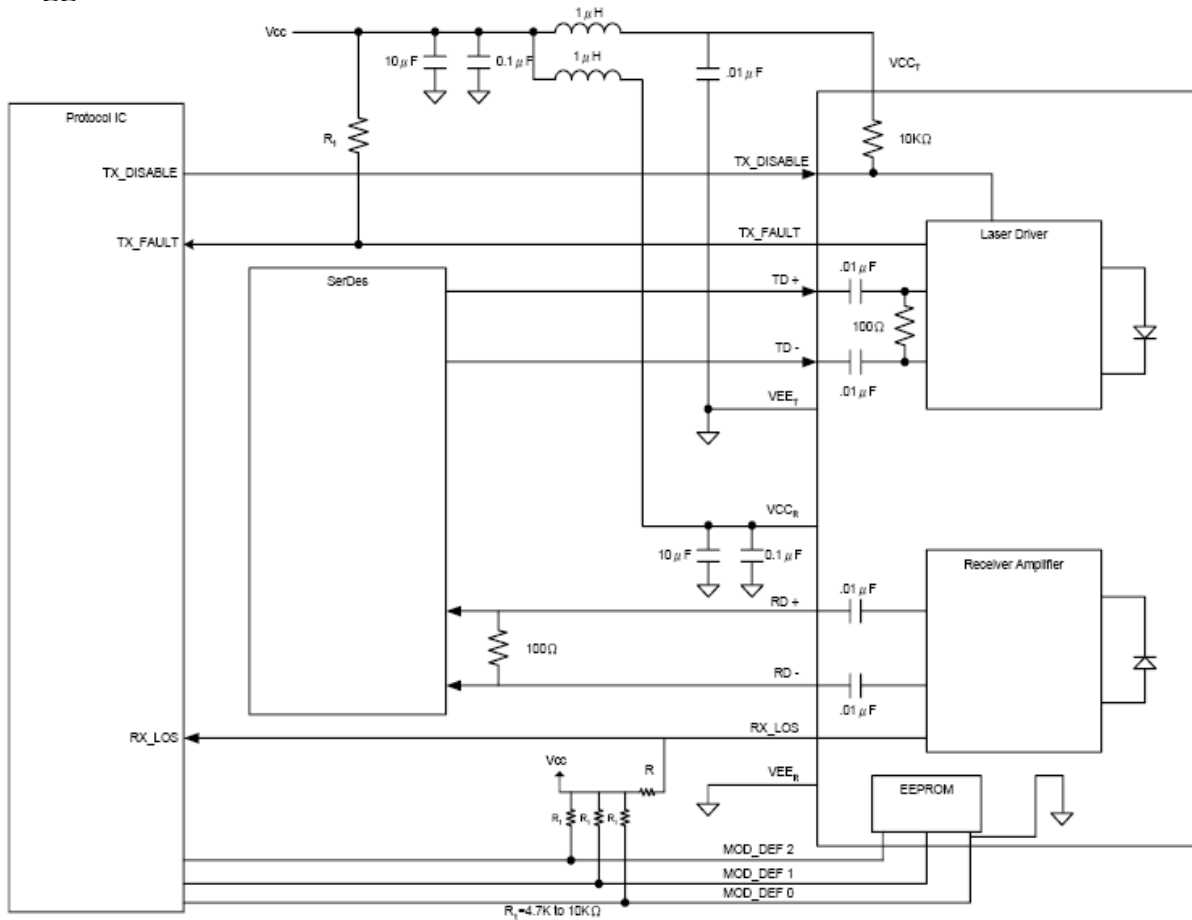

Warnings:

Handling Precautions: This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

Laser Safety: Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.



Mechanical Dimensions:

